

SOLUTIONS FOR CORROSIVE APPLICATIONS

PFA LINED VALVES



LINED BALL VALVE

Size Range: 0.5" to 12"



LINED BUTTERFLY VALVE

Size Range: 2" to 48"



LINED PLUG VALVE

Size Range: 0.5" to 12"



LINED GLOBE VALVE

Size Range: 0.5" to 6"



LINED SAMPLING VALVE

Size Range: 1" to 2"



LINED DIAPHRAGM VALVE

Size Range: 0.75" to 10"

PRESSURE RATING: 150#
FLANGE DRILLING: 150#, 300#

MATERIAL:
WCB, CF8 / CF8M / CF3M,
HASTELLOY C 276 / INCONEL /
DUPLEX / ALLOY 20 / Super Duplex / MONEL

LINING OPTIONS:
PFA / PVDF / PPH / ETFE /
UHMWPE / ANTISTATIC PFA

**AUTOMATION PACKAGE
AND HIGHER SIZES AVAILABLE
ON REQUEST**

CERTIFICATIONS
ISO 15848-1
FUGITIVE EMISSION
CERTIFIED

 **THE CHLORINE INSTITUTE**




LINED FITTINGS

LINING OPTIONS: PFA / PTFE / PVDF / PPH


DJK
ENERGY
VALVES & PUMPS



LINED UNEQUAL TEE
SIZE: 1" TO 24"

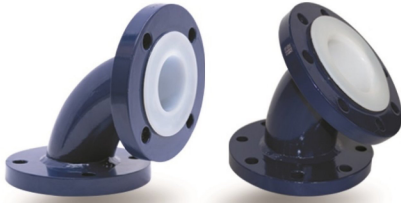

LINED ELBOW (90° & 45°)
SIZE: 0.5" TO 20"



LINED REDUCER
SIZE: 1" TO 12"



LINED EQUAL CROSS
SIZE: 1" TO 8"



LINED PIPE
SIZE: 0.5" TO 48"



PTFE EXPANSION-JOINT
SIZE: 2" TO 24"




LINED REDUCING FLANGE
SIZE: 0.75" TO 14"

HIGHER LINING THICKENSS CAN BE PROVIDED FOR VACUUM APPLICATIONS

SUBMERSIBLE PUMP (ACIDS & CHLORINE)

FOR CRITICAL SERVICE

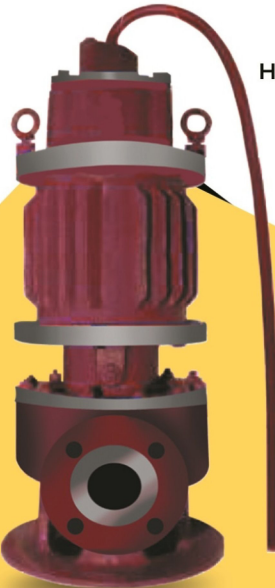


CAPACITY: UPTO 400M3/HR
HEAD: UPTO 40M
SPEED: 100HP
HANDLE SOLID SIZE UPTO 5MM

SIZE RANGE: 1" TO 6"
PFA LINED (3MM+ THICKNESS)
HIGH CORROSION RESISTANCE

IMPELLER TYPES: SEMI OPEN IMPELLER, OPEN IMPELLER, NON CLOG & VORTEX.

APPLICATIONS: HANDLING ACIDS, CORROSIVE ALKALI, PULP, EFFLUENT, SLUDGE, CONTAMINATED LIQUID, SEWAGE ETC.

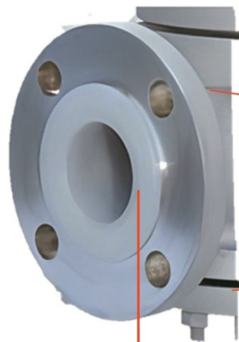

PFA / PTFE LINED



RATING: #150/#300

MATERIALS: CS + PTFE, SS+ PTFE

OPTIONS: BELLOWS, LIFTING LEVER, TEST GAG, FINNED BONNET.



✉ SALES@DJKVALVESPUMPS.COM
🌐 WWW.DJKVALVESPUMPS.COM

CONTACT / WHATSAPP
DJ: +1 832 213 9674
DEVA: +1 832 382 6034